

Engineering Specification

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____
 Tag _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

WD-H Series Grease Interceptor with Access Housing


Specification

Watts WD-H Series recessed epoxy coated steel grease interceptor with gasketed skid-proof cover secured with hex head center bolt(s), removable baffle assembly, deep seal trap with cleanout and air relief bypass, external vented flow control fitting, no hub (standard) connections, and epoxy coated steel access housing with skid-proof cover and adjustable carrier brackets.



Flow Rate		
Suffix	Description	
7	7 GPM	<input type="checkbox"/>
10	10 GPM	<input type="checkbox"/>
15	15 GPM	<input type="checkbox"/>
20	20 GPM	<input type="checkbox"/>
25	25 GPM	<input type="checkbox"/>
35	35 GPM	<input type="checkbox"/>
50	50 GPM	<input type="checkbox"/>
75	75 GPM	<input type="checkbox"/>

Options		
Suffix	Description	
-B	Sediment Bucket	<input type="checkbox"/>
-FC	Flange & Clamp Device	<input type="checkbox"/>
-O	Inlet & Outlet other than Standard	<input type="checkbox"/>
-SS	All Stainless Steel	<input type="checkbox"/>

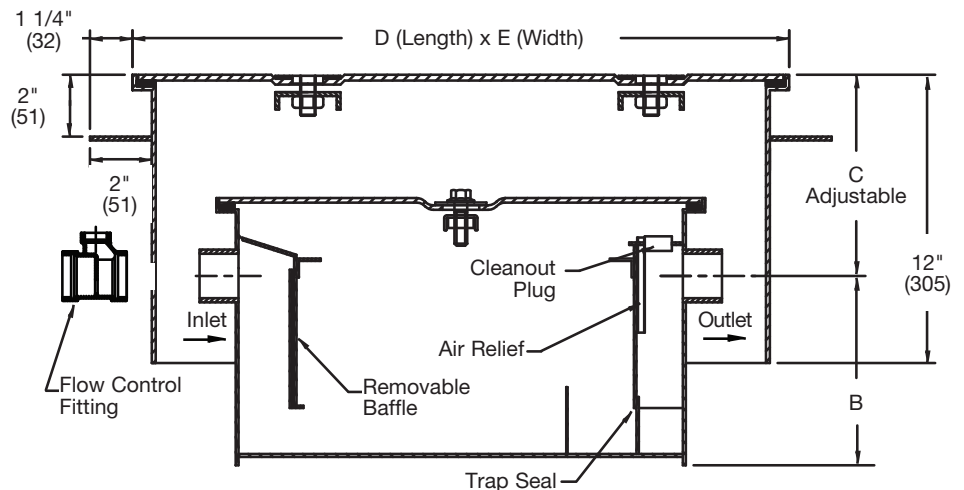

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



Dimensional Chart

Model No.	Flow Rate	Grease Capacity	Inlet & Outlet	B Base To Center	C Top To Center		D Length	E Width
	GPM	Lbs.			Min.	Max.		
WD-7-H	7	14	2"(51)	8 1/2"(216)	5 1/4"(133)	13 1/4"(337)	35"(889)	18 1/2"(470)
WD-10-H	10	20	2"(51)	8 1/2"(216)	5 1/4"(133)	13 1/4"(337)	39"(991)	19 1/2"(495)
WD-15-H	15	30	2"(51)	10 1/2"(267)	5 1/4"(133)	13 1/4"(337)	39"(991)	20 1/2"(521)
WD-20-H	20	40	3"(76)	11 1/2"(292)	5 1/4"(133)	13 1/4"(337)	41"(1041)	21 1/2"(546)
WD-25-H	25	50	3"(76)	12"(305)	6 1/4"(159)	14 1/4"(362)	43"(1092)	22"(559)
WD-35-H	35	70	3"(76)	14"(356)	6 3/4"(171)	14 3/4"(375)	47"(1194)	23 1/2"(597)
WD-50-H	50	100	4"(102)	16"(406)	7 1/4"(184)	15 1/4"(387)	49"(1245)	27 1/2"(699)
WD-75-H	75	150	4"(102)	18 1/2"(470)	7 3/4"(197)	15 3/4"(400)	53"(1346)	29 1/2"(749)



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com
Canada: T: (888) 208-8927 • F: (905) 481-2316 • Watts.ca
Latin America: T: (52) 55-4122-0138 • Watts.com