

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Deringer™ 50 Reduced Pressure Detector Assembly

2" – 8"

The Deringer™ 50 Reduced Pressure Detector assembly prevents non-health hazard pollutants and hazardous contaminants entering a potable water supply system when backpressure and/or backsiphonage conditions occur. Used primarily on fire sprinkler systems when monitoring of unauthorized water use is required.

Features


- Integral shutoff valves for indoor or outdoor application
- 100% stainless steel housing
- Tamper-resistant test cocks
- Stainless steel braided wire sensing line
- Patented Dual-action™ second check module
 - Poppet action at low flow
 - Swing action at high flow
- Balanced chamber relief valve with no sliding seals
- Poppet action first check for more reliable relief valve closure
- Lead free bronze bypass components
- CuFt or gallons bypass meter
- Single check bypass
- Prewired supervisory switches
- Flanged adapters available
- IPS grooved ends

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Ames Fire & Waterworks product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Ames Fire & Waterworks Technical Service. Ames Fire & Waterworks reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Ames Fire & Waterworks products previously or subsequently sold.

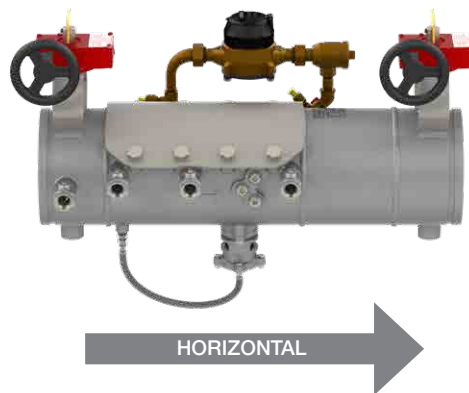

Approved for Fire Protection, Waterworks, Plumbing,
and Irrigation Applications

Specification

The Deringer 50 Reduced Pressure Detector assembly (RPDA-II) valve shall use two independent check modules and two integral resiliently seated shutoff valves, all of which shall be contained within a single rigid valve housing constructed entirely of 304 stainless steel. Both integral shutoff valves shall include prewired supervisory tamper switches contained within a weatherproof actuator housing approved for both indoor and outdoor use. The Dual-action second check module shall operate as a "poppet style" check under low flow conditions, operate as a "swing style" check under high flow conditions, and use replaceable silicone elastomer sealing discs. The assembly test cocks shall be handle-less and operate by a tamper-resistant actuator. The assembly shall have a single full access service port and cover with an in-line replaceable elastomer seal. All bypass assembly components shall be lead free and include a meter registering either gallons or cubic feet, a single check valve, and required test cocks. The relief valve shall operate using only static seals (zero dynamic/sliding seals). All wetted surface relief valve components shall be constructed of stainless steel. The assembly shall be serviceable without special tools.



Materials

Valve Housing:	304 Stainless Steel
Valve Cover:	304 Stainless Steel
SOV Disks:	EPDM/304SS
SOV Shafts:	304 Stainless Steel
Bypass Spring:	302 Stainless Steel
RV Spring:	302 Stainless Steel
SOV Bearings:	PTFE Fluoropolymer/Bronze
Non-wetted Bolts:	Grade 8 Zinc Plated
Check Disks:	Silicone (NSF)
Wetted Fasteners:	18-8 Stainless Steel
Bypass Components:	Lead Free Bronze
RV Housing:	304 Stainless Steel
Check Springs:	17-7 Stainless Steel
Check Pins:	17-7/18-8 Stainless Steel
Check Seats:	Noryl® Polymer (NSF)
O-rings:	Buna-N (NSF)
Bypass Internals:	ABS Polymer (NSF)
RV Hose:	Braided Stainless Steel Wire

Pressure – Temperature


Temperature Range: 33°F – 140°F
Working Pressure: 10 – 175 psi

Standards


AWWA C511-07 Compliant
ANSI/NSF/CAN 61 UL Certified Health Effects
UL Certified to ANSI/NSF/CAN 372 LEAD FREE

End Connections

- IPS Groove for Steel Pipe: AWWA C606
- Flange Adapters: ANSI B16.1 Class 125

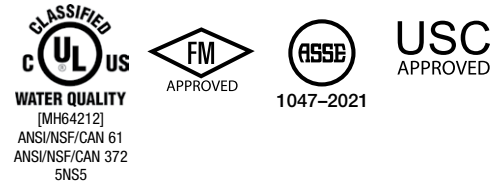

Dimensions – Weights



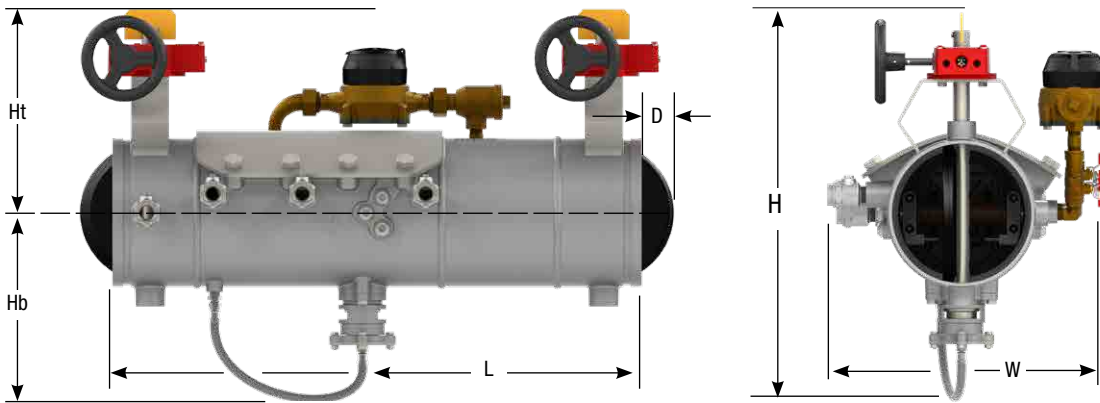


Size	Model	Ht		Hb		L		D		H		W		Weight	
in.		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb	kg
2 (2½)**	50	9.3	236	8.7	221	22.1	561	0.0	0	18.0	457	12.5	318	59	27
2½	50	7.1	180	8.7	221	18.7	475	0.0	0	15.8	401	11.0	279	47	21
3	50	7.4	188	8.7	221	18.7	475	0.0	0	16.1	409	11.0	279	49	22
4	50	7.9	201	8.7	221	18.7	475	0.2	5	16.6	422	11.0	279	51	23
6	50	10.1	257	10.5	267	25.0	635	1.0	25	20.6	523	15.1	384	89	40
8	50	10.4	264	10.7	272	31.0	787	1.8	46	21.1	536	13.8	351	150	68

**2" size uses a 2½" assembly with 2½" groove to 2" female NPT adapter and couplings. Adapter and couplings ship unassembled.

Flow Performance

● = Rated Flow ▲ = UL Tested ○ = 15 fps

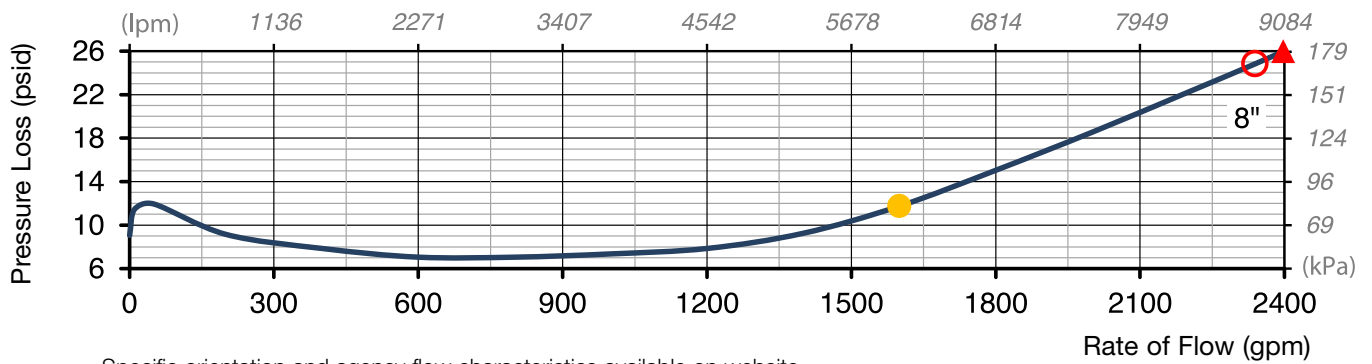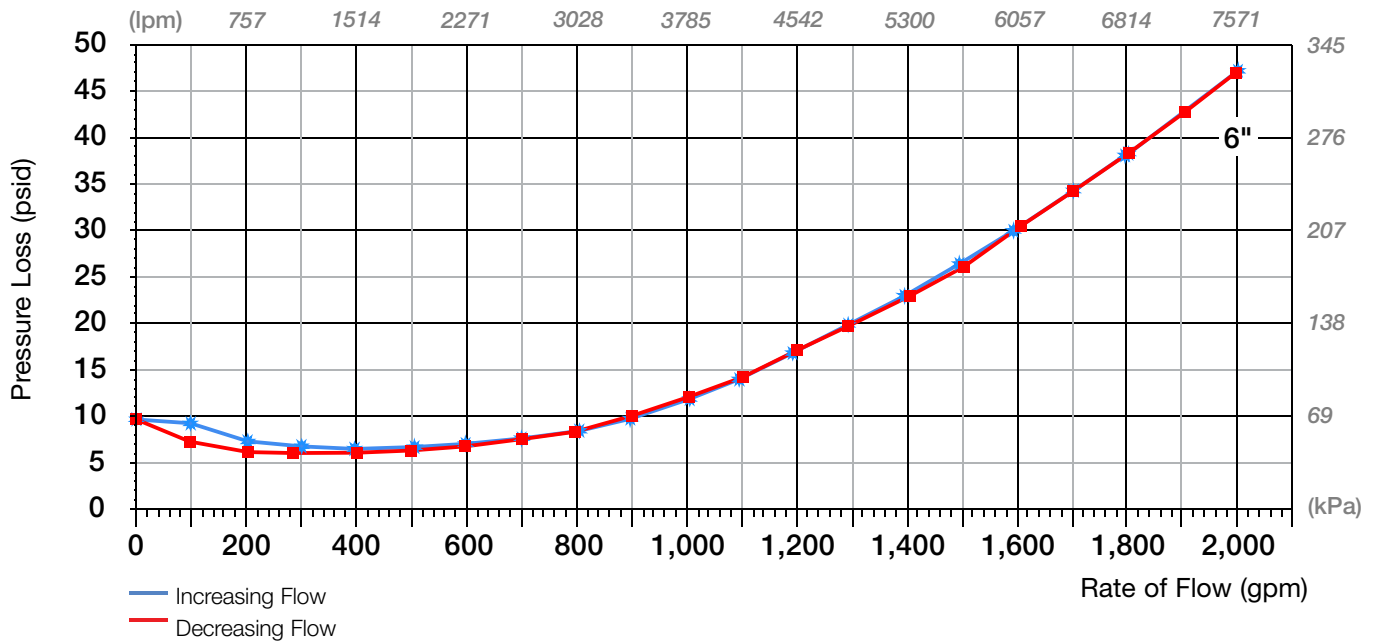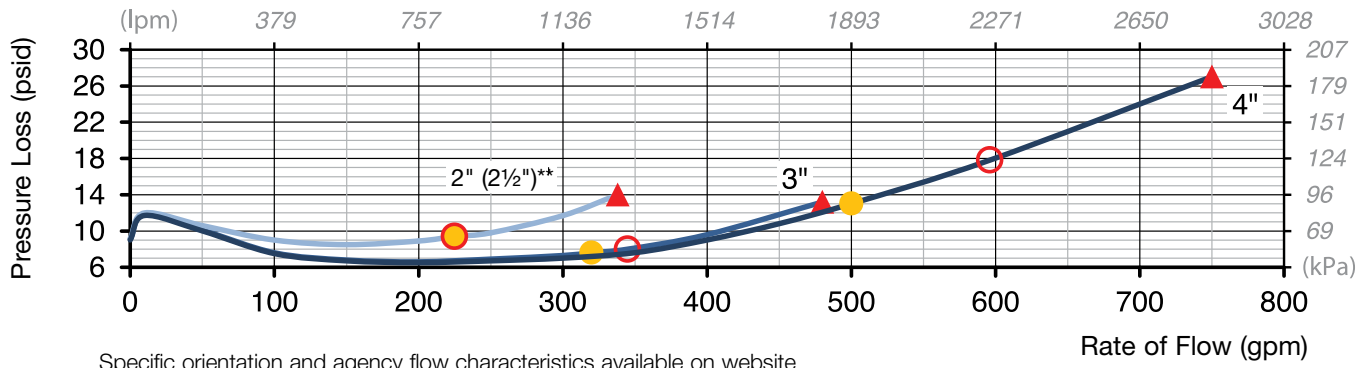

A WATTS Brand

USA: Backflow T: (978) 689-6066 • F: (978) 975-8350 • AmesFireWater.com
 USA: Control Valves T: (713) 943-0688 • F: (713) 944-9445 • AmesFireWater.com
 Canada: T: (888) 208-8927 • F: (888) 479-2887 • AmesFireWater.com
 Latin America: T: (52) 55-4122-0138 • AmesFireWater.com