Engineering Specification

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

FD-530

Large Capacity Offset Parking Area Drain

Specification


Watts FD-530 epoxy coated offset parking area drain with fabricated steel body, extra heavy duty 24 1/2" x 24 1/2" two-section ductile iron grate, and no hub (standard) outlet.

Call customer service if you need assistance with technical details.

Pipe Sizing		
Suffix	Description	
3	3"(76) Pipe Size	
4	4"(102) Pipe Size	
6	6"(152) Pipe Size	
8	8"(203) Pipe Size	
10	10"(254) Pipe Size	

Options			
Suffix	Description		
-C	Membrane Clamp		
-T	Threaded Outlet		
-5	Sediment Bucket		
-6	Vandal Proof		
-38	Solid Retaining Baffle		

Load	Free Area
Rating	Sg. In.
XHD	208

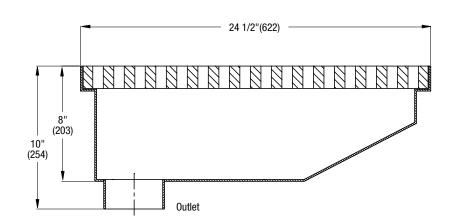

NOTICE

Please consult factory.

The load classifications are in accordance with the American National Standard ASME A112.21.1M ASME Ratings are as follows: XHD Safe Live Load 7500-10,000 lbs. (3375-4500 kg) The above categories are given as a guide only.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

WATTS

USA: T: (800) 338-2581 • Watts.com **Canada:** T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-FD-530 2432 © 2024 Watts